



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 04 OCT 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03103206.3

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03103206.3  
Demande no:

Anmeldetag:  
Date of filing: 20.08.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Mars Incorporated  
6885 Elm Street  
McLean,  
Virginia 22101-3883  
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and device for packaging products and array of packaged products

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B65B11/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## METHOD AND DEVICE FOR PACKAGING PRODUCTS AND ARRAY OF PACKAGED PRODUCTS

The invention relates to a method for packaging products,  
5 such as candies, wherein the products are positioned on a  
first sheet which is continuously moved in a transport  
direction, wherein the products are covered by a second sheet  
which is continuously moved in the same transport direction  
and which is aligned substantially plane-parallel to the  
10 first sheet, and wherein the first and second sheets are  
sealed together near the outer edges of the individual  
products or grouped products by a sealing device.

Such a method is used for providing a bandoleer of  
15 individually packaged products or of products that are  
grouped together in one sealed envelope, wherein the  
envelopes can be separated from each other at a later stage.  
The invention aims at an improved method, wherein products  
can be wrapped efficiently at a fast speed, wherein the  
20 packaging device can be easily adapted for differently sized  
products, wherein as little packaging material as possible is  
used, and/or wherein brittle products can be wrapped with as  
little damage possible.

25 To that end the sealing device comprises sealing ribs  
extending substantially transversely to the transport  
direction on one side of the moving sheets, wherein said  
sealing ribs are being moved at the same speed as the sheets  
and the sealing ribs seal the first and second sheets  
30 together in between the moving products. Thereby the sheets  
can move continuously, without the need to interrupt the  
movement for sealing the sheets together. Preferably the  
sealing device comprises a rotating frame, the rotation axis  
of said frame extending transversely to the transport

direction, wherein said sealing ribs extend from a coaxial cylindrical surface of said frame.

In order to prevent damage to the products, in particular if  
5 the products have a substantial height, at least one of said  
sheets is preferably pre-shaped to fit at least partially  
around the products before the film comes into contact with  
the products. Said pre-shaping action is preferably performed  
by a pre-shaping device comprising a first rotating shaping  
10 frame on one side of the moving sheet and a second rotating  
shaping shape on the opposite side of the moving sheet, the  
rotation axes of both frames extending transversely to the  
transport direction of the sheet, wherein said frames  
comprise co-operating protruding shaping ribs extending  
15 substantially transversely to the transport direction,  
wherein the shaping ribs of both frames move between each  
other, and wherein said shaping ribs are being moved at the  
same speed as the pre-shaped sheet. Preferably the first pre-  
shaping frame is positioned such that it guides the pre-  
20 shaped film towards the other moving sheet while including  
the products. Preferably the first pre-shaping frame is the  
same frame as the rotating frame of the sealing device, and  
the shaping ribs on said frame are said sealing ribs.

25 The described method is particularly advantageous when the  
~~products have an elongated form and are positioned~~  
transversely on the first moving sheet. Preferably the  
sealing ribs comprise ultrasonic welding means. Preferably  
the sealed areas between the products are perforated or  
30 scored, such that the packaged products stay attached to each  
other, but can be easily separated.

---

The invention also relates to a device for packaging products, such as candies, comprising first transport means for continuously moving a first sheet in a transport direction, positioning means for positioning the products on the first sheet, second transport means for continuously moving a second sheet in the same transport direction in alignment substantially plane-parallel to the first sheet while covering the products, and a sealing device for sealing the first and second sheets together near the outer edges of the individual products, wherein the sealing device comprises protruding sealing ribs extending substantially transversely to the transport direction, and said sealing device further comprises synchronizing means for moving said sealing ribs at the same speed as the sheets while sealing the first and second sheets together in between the moving products.

Furthermore the invention relates to a method for packaging products, such as candies, wherein the products are positioned on a first sheet which is continuously moved in a transport direction, wherein the products are covered by a second sheet which is continuously moved in the same transport direction and which is aligned substantially plane-parallel to the first sheet, and wherein the first and second sheets are sealed together near the outer edges of the individual products by a sealing device, wherein at least one of said sheets is pre-shaped by a pre-shaping device to fit at least partially around the products before the sheet comes into contact with the products, wherein said pre-shaping device comprises a first rotating shaping frame on one side of the moving sheet and a second rotating shaping frame on the opposite side of the moving sheet, the rotation axes of both drums extending transversely to the transport direction of the sheet, wherein said frames comprise co-operating

protruding shaping ribs extending substantially transversely to the transport direction, wherein the shaping ribs of both frames move between each other, and wherein said shaping ribs are being moved at the same speed as the pre-shaped sheet.

5

The invention also relates to a device for packaging products, such as candies, comprising first transport means for continuously moving a first sheet in a transport direction, positioning means for positioning the products on  
10 the first sheet, second transport means for continuously moving a second sheet in the same transport direction in alignment substantially plane-parallel to the first sheet while covering the products, a sealing device for sealing the first and second sheets together near the outer edges of the  
15 individual products, and a pre-shaping device for pre-shaping at least one of said sheets to fit at least partially around the products before the sheet comes into contact with the products, wherein said pre-shaping device comprises co-operating protruding shaping ribs extending substantially  
20 transversely to the transport direction, wherein the shaping ribs of both drums are movable between each other, and said pre-shaping device further comprises synchronizing means for moving said shaping ribs at the same speed as the pre-shaped sheet.

25

---

~~Further the invention relates to an array of packaged~~  
products, such as candies, comprising two sheets which are sealed together and enclose said products or groups of products, wherein the sealed areas between the products are  
30 weakened, for instance by scores of perforations, such that the packaged products can be easily separated, wherein one of said sheets is a substantially flat relatively rigid board or  

---

film and the other sheet is a relatively flexible foil shaped

to fit at least partially around the products. Preferably the sides of the sealed sheets extending from the outer ends of the products are bend, upwards or downwards, in order to give the array rigidity in its longitudinal direction. In this manner a very efficiently packaged product is obtained. The extending sides of the sealed sheets can be given such a length that they can be bend further, over the packaged products and be sealed together, such that the rigid board forms a protective tubular box.

The invention will be illustrated with reference to the drawings, wherein:

Fig. 1 shows a schematic perspective view of a packaging device;

Fig. 2 shows a schematic side view of a detail of the packaging device of Fig. 1;

Fig. 3 shows a further schematic side view of a detail of the packaging device of Fig. 1;

Fig. 4 shows a perspective view of an array of packaged products.

With reference to Figures 1, 2 and 3 the packaging device has a first roll of card board 1 and a second roll of plastic film 2. The elongated candy bars 3 are placed transversely on a first endless conveyor 4. A separation device 5 has a barrier which moves up and down at regular intervals for spacing the candy bars 3 a pre-defined distance apart.

The second conveyor 6, the third conveyor 7, the fourth conveyor 8, the fifth conveyor 9, as well as the card board 1 all move at the same speed, which is larger than the speed of conveyor 4 in order to accommodate the larger mutual distance of the candy bars.

The plastic film 2 is led between a co-operating rotating shaping drums 10, 11. Both drums 10, 11 have protruding shaping ribs 12, 13 which during rotation are moved between each other like a gear unit, thereby corrugating the plastic film 2 into the desired shape. The drum 10 has flexible suction cups 14 between its ribs 12 which hold the pre-shaped film by a vacuum action force.

The pre-shaped film 2 is placed on top of the moving candy bars 3 by the drum 10 while they are at the same time being transferred by the conveyor 6 onto the moving cardboard 1. In this manner the candy bars 3 are enclosed in the cardboard 1 and the pre-shaped plastic film 2. When the ribs 12 are at their lowest point the plastic film 2 they push the plastic film 2 onto the cardboard 1, where the plastic film 2 is welded on the cardboard 1 by a first ultrasonic welding device 22, which co-operate with ultrasonic welding means present in the sealing ribs 12. In this manner a series of interconnected tubes is formed, each tube comprising a candy bar. By changing the opening time of the separation device 5 also two or more candy bars 3 can be grouped together and enclosed in a single tube thereby.

Subsequently the transverse seals between the candy bars 3 are perforated or scored by a rotating drum 14 having scoring or perforating ribs 15. Then the ends of the film 1 which extend from the sides of the candy bars 3 are pushed down by



two further ultrasonic sealing devices 16 and sealed to the cardboard 1, whereby the candy bars 3 are enclosed inside the cardboard and plastic film in an airtight manner. At this stage the candy bars 3 form an endless array of

5 interconnected packaged products. The separation drum 17 separates the products into arrays 19 of for instance six candy bars each by means of cutting ribs 18.

The array 19 of candy bars 3 as shown in Figure 4 thereby has  
10 a cardboard layer 1 on the bottom side and a shaped plastic film layer 2 on the top side which is sealed onto the cardboard layer 1 in between the candy bars 3. These transverse seals have scores or perforations 20 so that individual products can be easily torn off, without breaking  
15 the seal. Both sealed longitudinal sides 21 of the package are folded upwards, giving the array 19 such rigidity that it can subsequently be treated as a box. The array 19 can be shipped to and exposed in shops, and sold to the public,  
20 as is the case with prior art packaging methods of candy bars.

**CLAIMS**

1. A method for packaging products (3), such as candies,  
wherein the products (3) are positioned on a first  
5 sheet (1) which is continuously moved in a transport  
direction, wherein the products (3) are covered by a  
second sheet (2) which is continuously moved in the  
same transport direction and which is aligned  
substantially plane-parallel to the first sheet (1),  
10 and wherein the first and second sheets (1,2) are  
sealed together near the outer edges of the  
individual products (3) or grouped products by a  
sealing device (10, 22, 16), characterised in that  
the sealing device comprises sealing ribs (12)  
15 extending substantially transversely to the transport  
direction on one side of the moving sheets (1, 2),  
wherein said sealing ribs (12) are being moved at the  
same speed as the sheets (1, 2) and the sealing ribs  
(12) seal the first and second sheets (1, 2) together  
20 in between the moving products (3).
2. The method according to claim 1, wherein the sealing  
device (10, 22, 16) comprises a rotating frame (10),  
the rotation axis of said frame (10) extending  
25 transversely to the transport direction, wherein said  
sealing ribs (12) extend from a coaxial cylindrical  
surface of said frame (10).
3. A method according to claim 1, wherein at least one  
30 of said sheets (2) is pre-shaped to fit at least  
partially around the products (3) before the sheet  
(2) comes into contact with the products (3).

4. A method according to claim 2, wherein said pre-shaping action is performed by a pre-shaping device (10, 11) comprising a first rotating shaping frame (10) on one side of the moving sheet (2) and a second  
5 rotating shaping frame (11) on the opposite side of the moving sheet (2), the rotation axes of both frames (10, 11) extending transversely to the transport direction of the sheet (2), wherein said frames (10, 11) comprise co-operating protruding  
10 shaping ribs (12, 13) extending substantially transversely to the transport direction, wherein the shaping ribs (12, 13) of both frames (10, 11) move between each other, and wherein said shaping ribs (12, 13) are being moved at the same speed as the  
15 pre-shaped sheet (2).
5. A method according to claim 3, wherein the first pre-shaping frame (10) is positioned such that it guides the pre-shaped film (2) towards the other moving  
20 sheet (1) while including the products (3).
6. A method according to any of the preceding claims 1 - 4, wherein the products (3) have an elongated form and are positioned transversely on the first moving  
25 sheet (1).
- 
7. A method according to any of the preceding claims 1 - 5, wherein the sealing ribs (12) comprise ultrasonic welding means.  
30
8. A method according to any of the preceding claims, wherein the sealed areas between the products (3) are  
perforated or scored, such that the packaged products
-

(3) stay attached to each other, but can be easily separated.

- 5 9. A device for packaging products (3), such as candies, comprising first transport means (8) for continuously moving a first sheet (1) in a transport direction, positioning means (4, 5, 6) for positioning the products (3) on the first sheet (1), second transport means (10) for continuously moving a second sheet (2) 10 in the same transport direction in alignment substantially plane-parallel to the first sheet (1) while covering the products (3), and a sealing device (10, 22, 16) for sealing the first and second sheets (1, 2) together near the outer edges of the 15 individual or grouped products (3), characterised in that the sealing device (10, 22, 16) comprises protruding sealing ribs (12) extending substantially transversely to the transport direction, and said sealing device (10, 22, 16) further comprises 20 synchronizing means for moving said sealing ribs (12) at the same speed as the sheets (1, 2) while sealing the first and second sheets (1, 2) together in between the moving products (3).
- 25 10. A method for packaging products (3), such as candies, wherein the products (3) are positioned on a first sheet (1) which is continuously moved in a transport direction, wherein the products (3) are covered by a second sheet (2) which is continuously moved in the 30 same transport direction and which is aligned substantially plane-parallel to the first sheet (1), and wherein the first and second sheets (1, 2) are sealed together near the outer edges of the

individual grouped products (3) by a sealing device (10, 22, 16), wherein at least one of said sheets (2) is pre-shaped by a pre-shaping device (10, 11) to fit at least partially around the products (30) before the sheet (2) comes into contact with the products (3), characterised in that said pre-shaping device (10, 11) comprises a first rotating shaping frame (10) on one side of the moving sheet (2) and a second rotating shaping frame (11) on the opposite side of the moving sheet (2), the rotation axes of both frames extending transversely to the transport direction of the sheet (2), wherein said frames comprise co-operating protruding shaping ribs (12, 13) extending substantially transversely to the transport direction, wherein the shaping ribs (12, 13) of both frames (10, 11) move between each other, and wherein said shaping ribs (12, 13) are being moved at the same speed as the pre-shaped sheet (2).

11. A device for packaging products (3), such as candies, comprising first transport means (8) for continuously moving a first sheet (1) in a transport direction, positioning means (4, 5, 6) for positioning the products (3) on the first sheet (1), second transport means (10) for continuously moving a second sheet (2) in the same transport direction in alignment

substantially plane-parallel to the first sheet (1) while covering the products (3), a sealing device (10, 22, 16) for sealing the first and second sheets (1, 2) together near the outer edges of the individual or grouped products (3), and a pre-shaping device (10, 11) for pre-shaping at least one of said sheets (2) to fit at least partially around the

products (3) before the sheet comes into contact with the products (3), characterised in that said pre-shaping device (10, 11) comprises a first rotating shaping frame (10) on one side of the moving sheet (2) and a second rotating shaping frame (11) on the opposite side of the moving sheet (2), the rotation axes of both frames (10, 11) extending transversely to the transport direction of the sheet (2), wherein said frames (10, 11) comprise co-operating protruding shaping ribs (12, 13) extending substantially transversely to the transport direction, wherein the shaping ribs (12, 13) of both frames are movable between each other, and said pre-shaping device (10, 11) further comprises synchronizing means for moving said shaping ribs (12, 13) at the same speed as the pre-shaped sheet (2).

12. An array (19) of packaged products (3), such as candies, comprising two sheets (1, 2) which are sealed together and enclose said products (3) or groups of products, wherein the sealed areas between the products (3) are weakened, such that the packaged products (3) can be easily separated, characterised in that one of said sheets (1) is a substantially flat relatively rigid board or film and the other sheet (2) is a relatively flexible foil shaped to fit at least partially around the products (3).


13. An array (19) of products (3) according to claim 11 or 12, wherein the products (3) have an elongated form and are positioned transversely with respect to the sheets (1, 2).

14. An array (19) of products according to claim 13,  
wherein the sides of the sealed sheets (1, 2)  
extending from the outer ends of the products (3) are  
bend in order to give the array (19) rigidity in its  
longitudinal direction.

**ABSTRACT**

A method for packaging products, such as candies, wherein the products are positioned on a first sheet which is  
5 continuously moved in a transport direction, wherein the products are covered by a second sheet which is continuously moved in the same transport direction and which is aligned substantially plane-parallel to the first sheet, and wherein the first and second sheets are sealed together near the  
10 outer edges of the individual products or grouped products by a sealing device, wherein the sealing device comprises sealing ribs extending substantially transversely to the transport direction on one side of the moving sheets, wherein said sealing ribs are being moved at the same speed as the  
15 sheets and the sealing ribs seal the first and second sheets together in between the moving products.



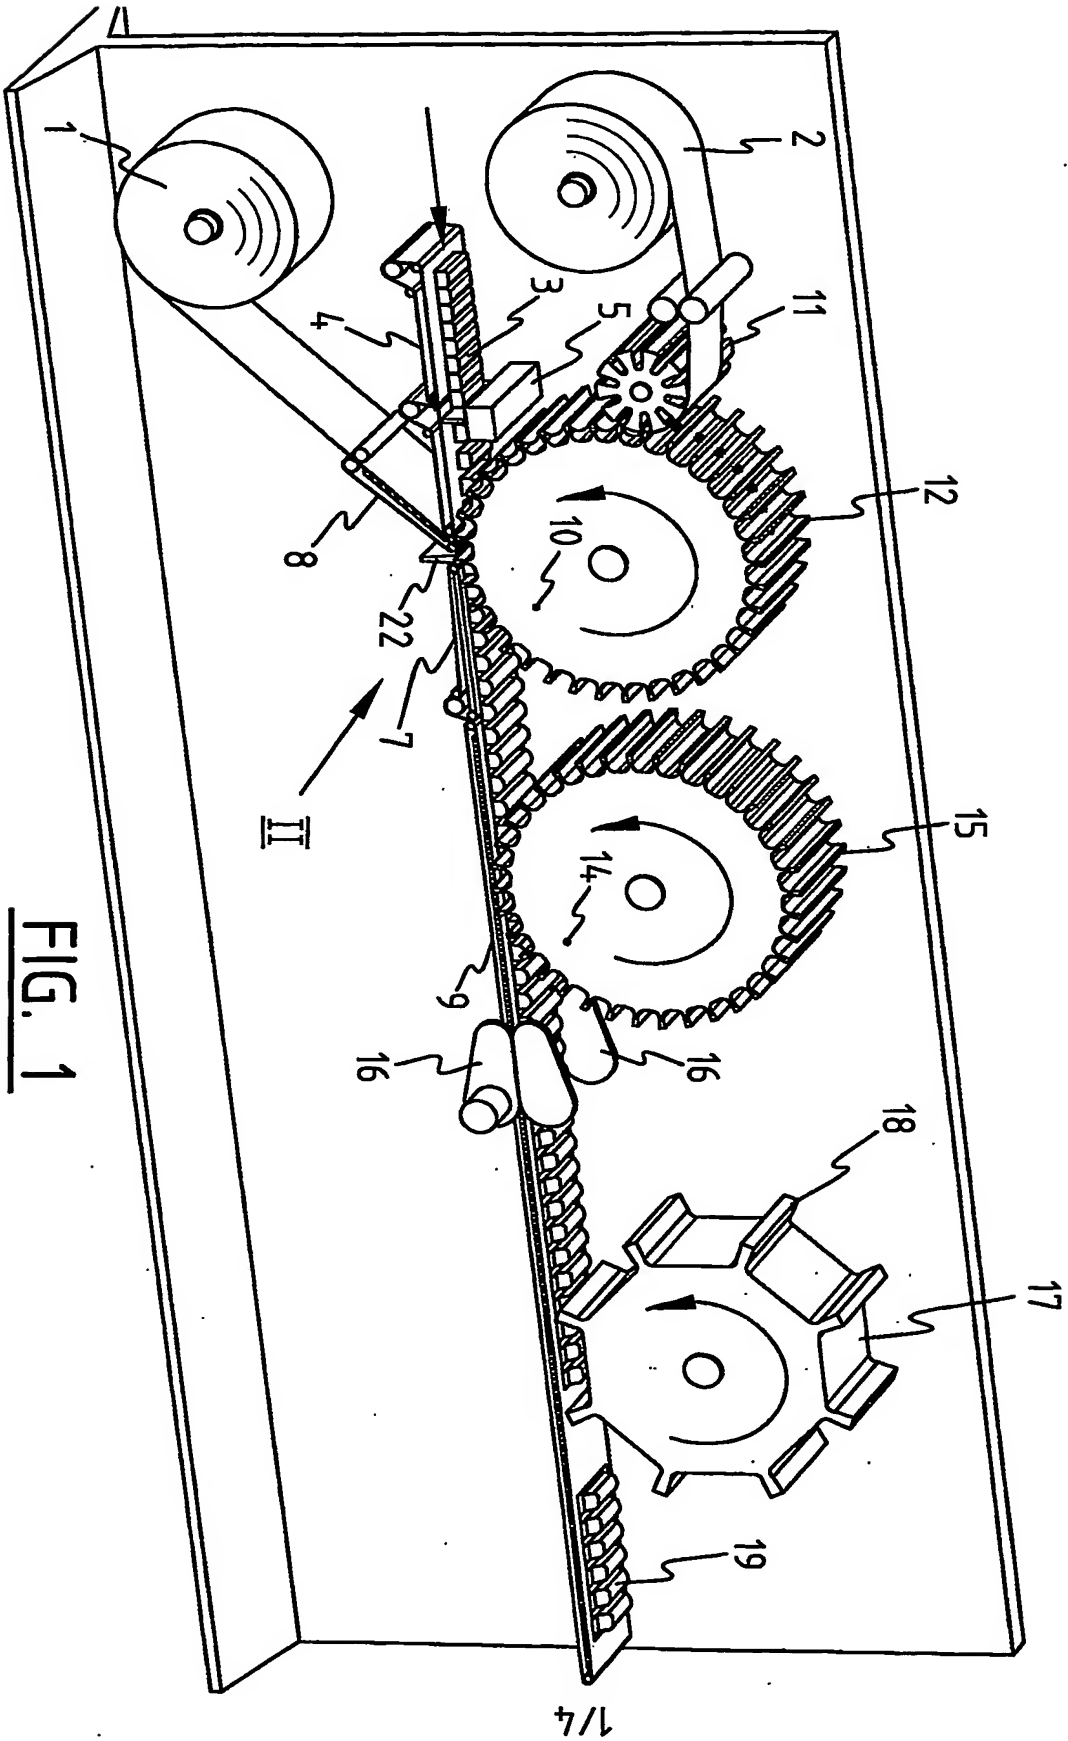

**FIG. 1**

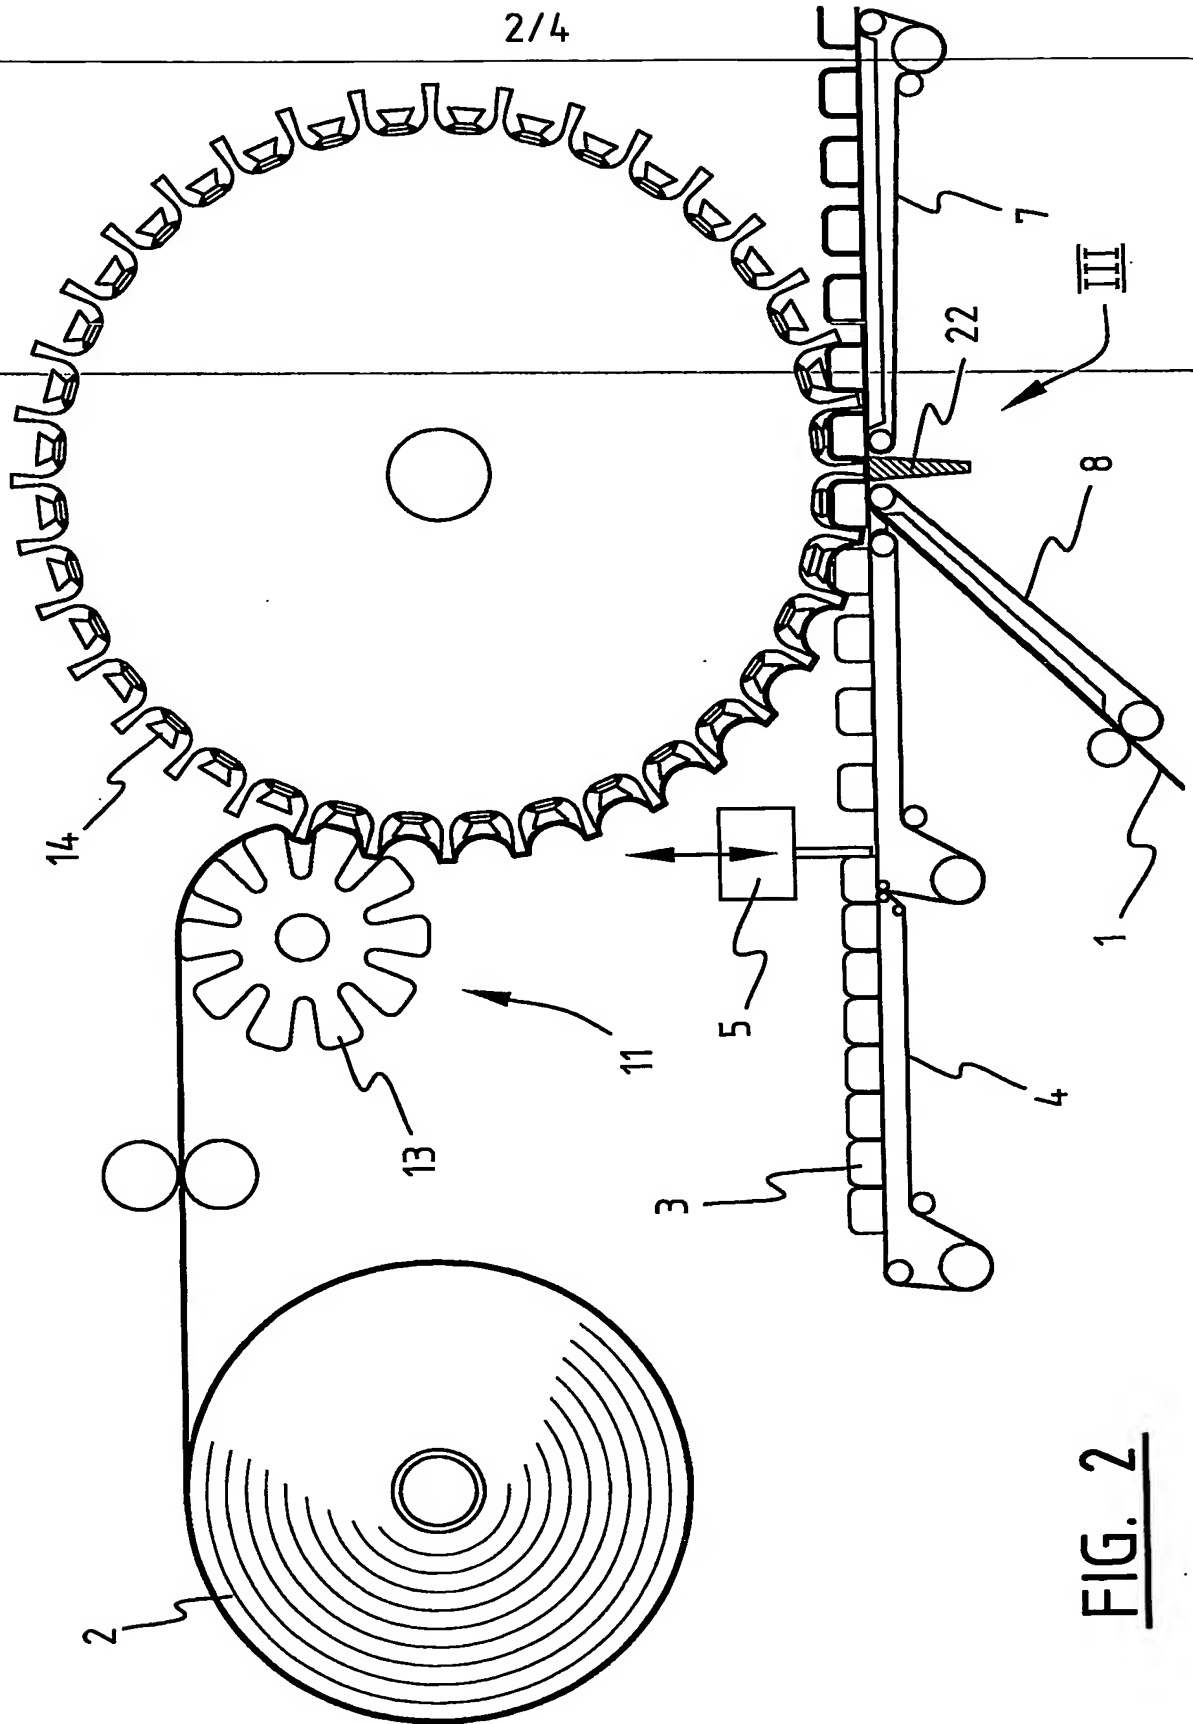


FIG. 2


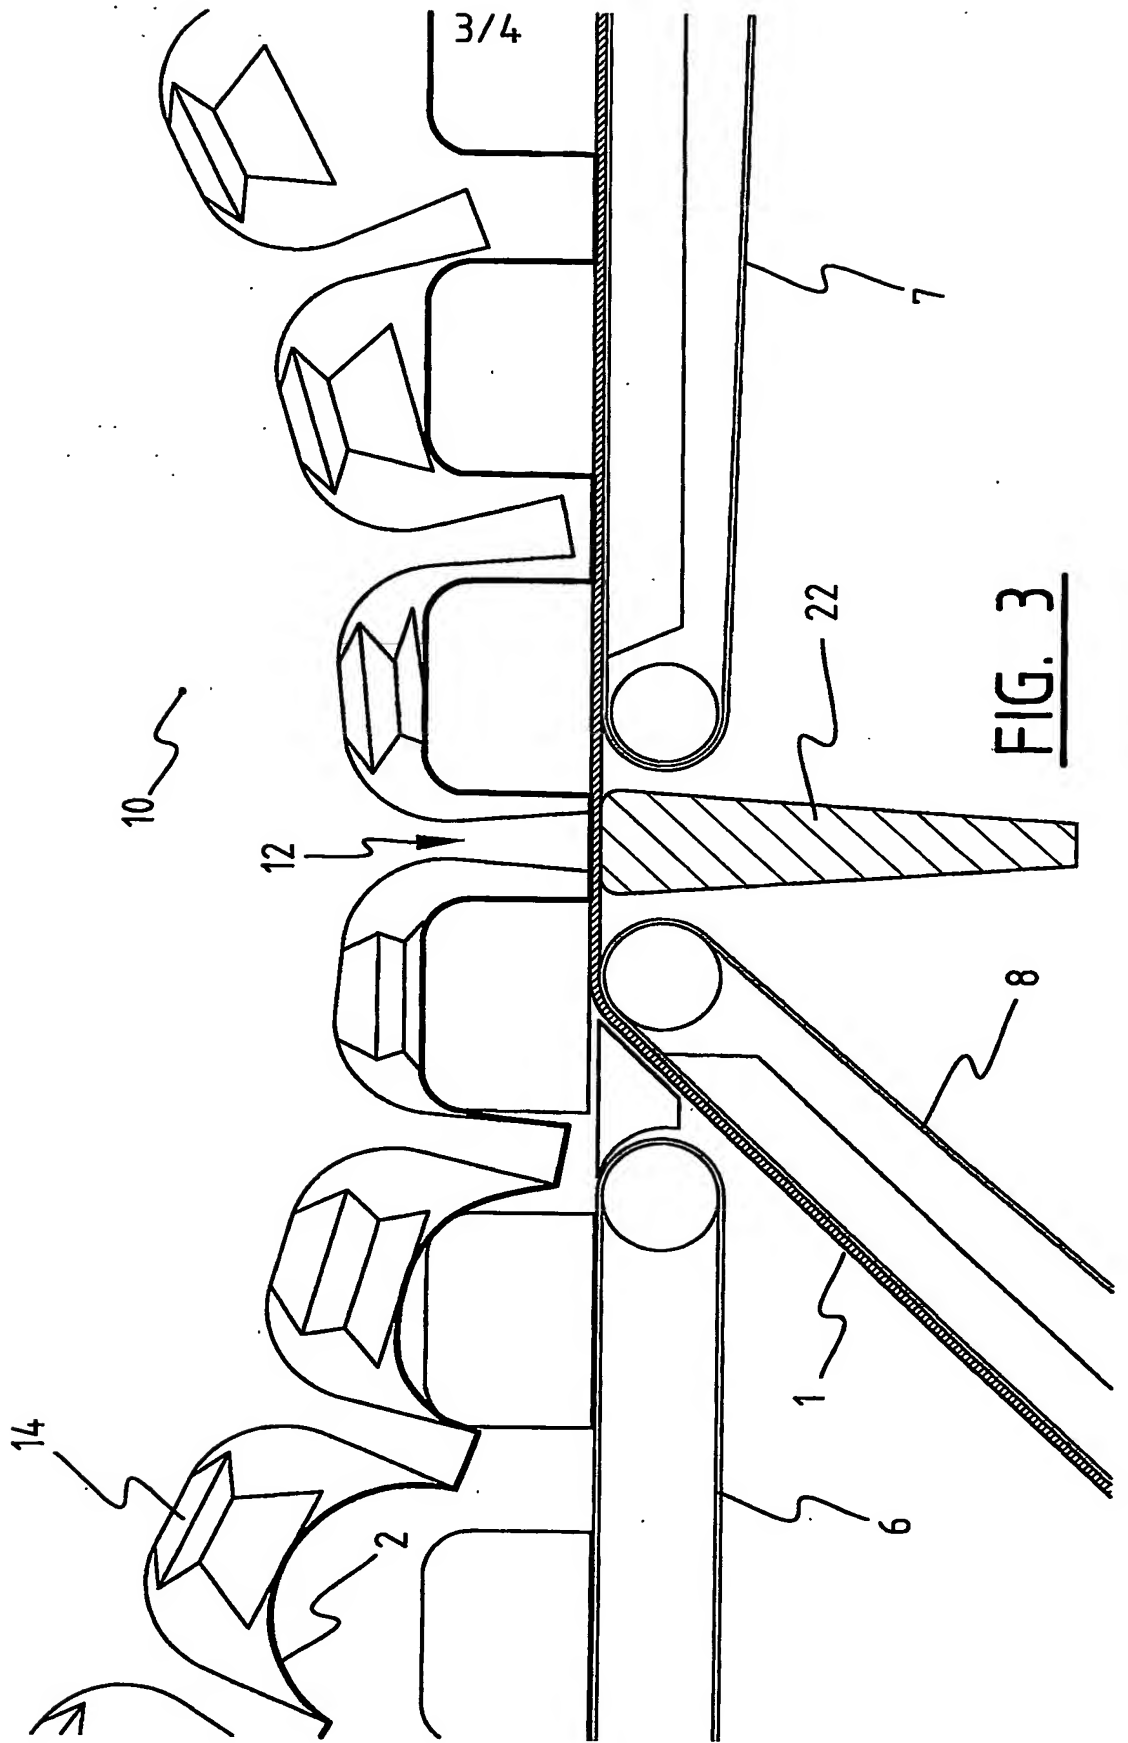


FIG. 3

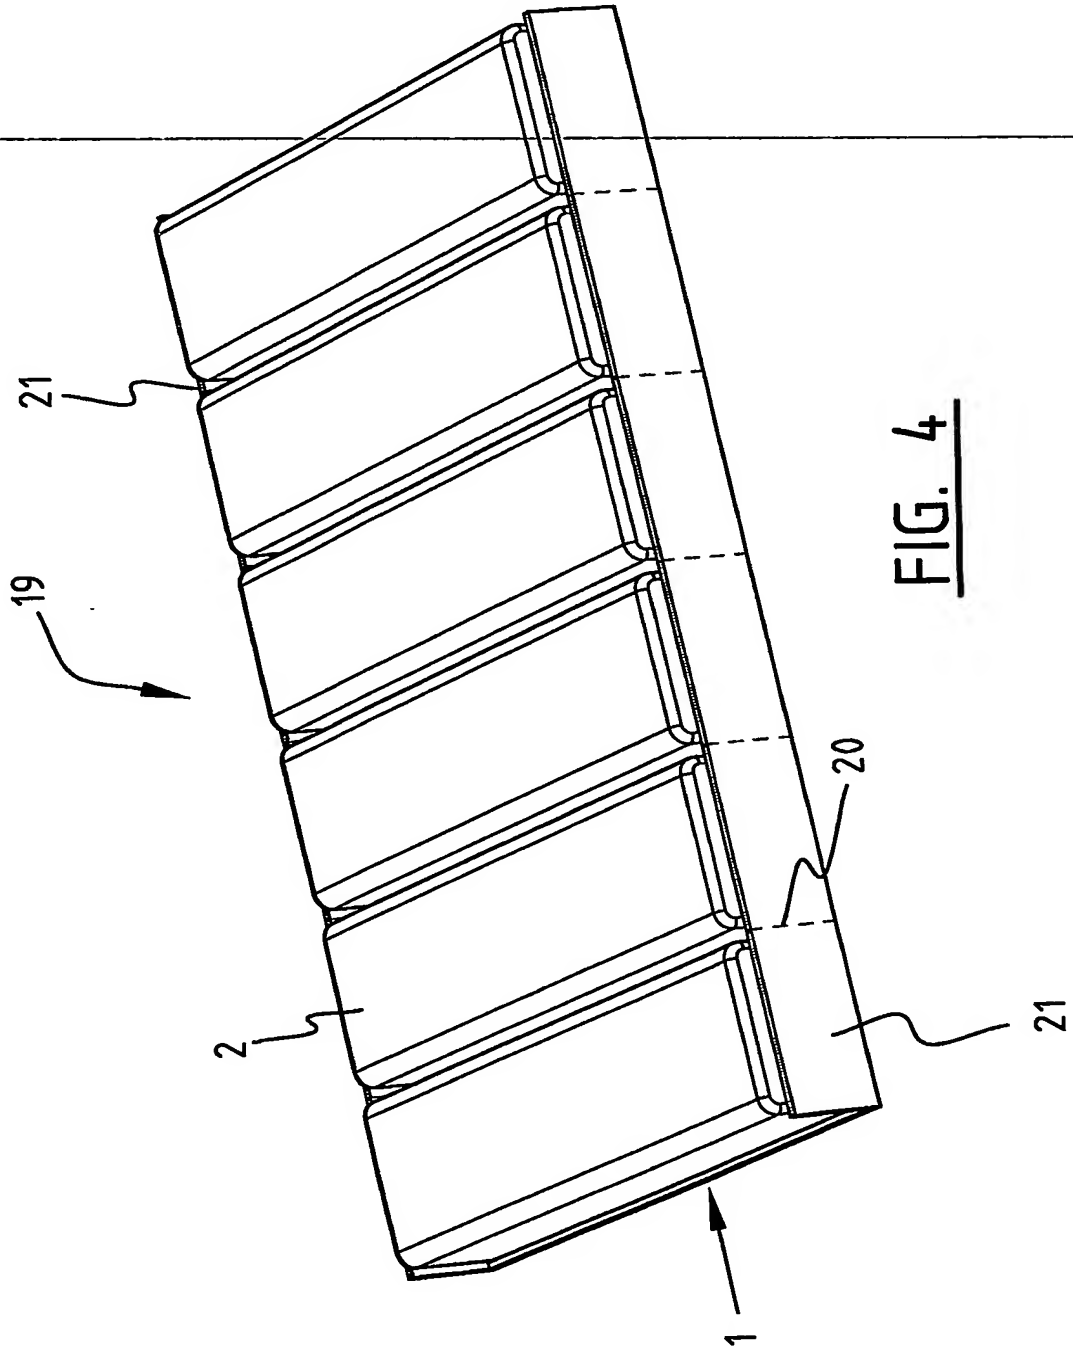

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**